



### Description

GPDT15 Controllers work with Levven wire-free switches to wirelessly turn lights on and off. Use Levven devices anywhere in your home or business, including detached garages, gatehouses, exterior lights, barns, and storage buildings. All without running a wire to the switch.

### Installation

Connect the power and the load to the controller, then mount the controller in a junction or switch box. Pair a Levven switch with the controller to turn on, off, and dim the load. For more detailed instructions, check the user manual.

### Specifications:

Input	85-265VAC, 0.1~1.5A, 50/60Hz
Paired Switches	Up to 10 Switches
Wireless Range	75 m / 250 ft
Radio Frequency	900 MHz band
Encryption	128-bit
Color	Orange
Operating temp	-40°C to 50°C
Enclosure rating	Indoor use only

### Physical dimensions:

Length	1.8" (46mm)
Width	1.5" (38mm)
Depth	1.1" (29mm)

### Load ratings:

1.5A resistive, 1.5A general purpose (0.75 to 0.80PF), 1A tungsten-filament, halogen, 1A magnetic ballast or transformer, 1A e-ballast, 1/16HP (120V) or 1/10HP (250V) motor.



Incandescent  
up to 1A



CFL  
up to 1A



LED  
up to 1A




Flourescent  
up to 1A



Motor  
1/16 HP (120V) or  
1/10HP (250V)

### Wiring:

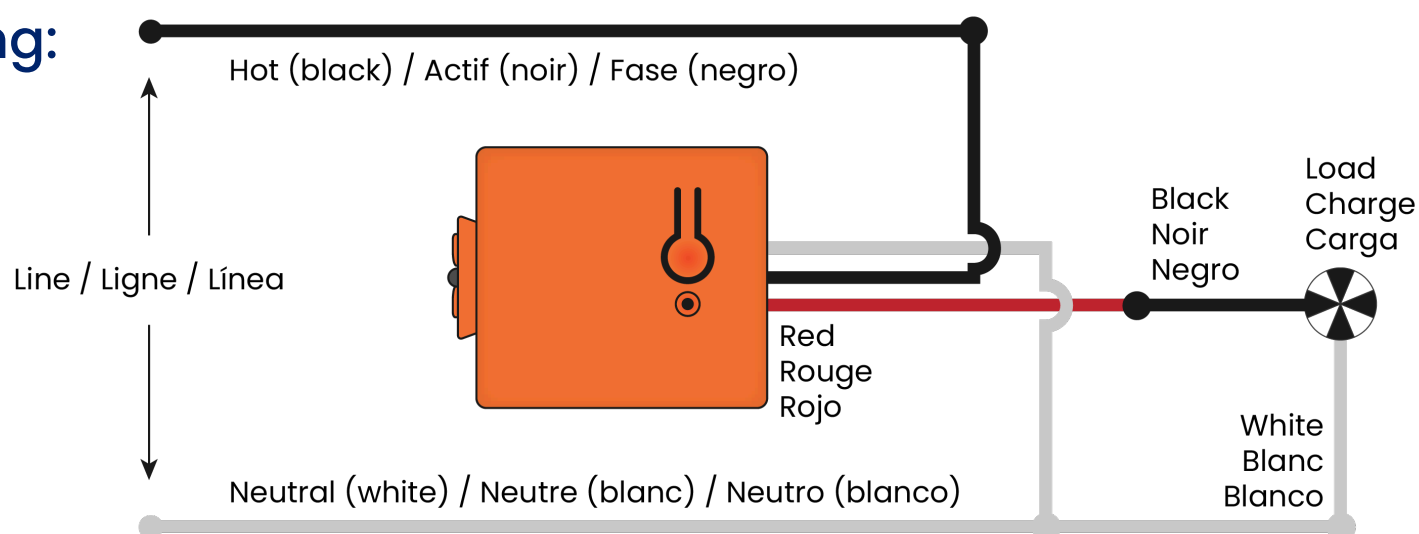

Certifications for GPDT15 Controller:

Certified to CSA STD C22.2 #14

Conforms to UL 244A & 508

FCC ID: 2ADH9-G2CF IC ID: 12453A-G2CF

C/US ETL Listed 4010961



Manufacturer information:

Levven Electronics Ltd.

9741 - 54 Ave NW

Edmonton, AB, Canada T6E 5J4

Proudly manufactured in

Telephone: +1 (844)-553-8836

Email: [info@levven.com](mailto:info@levven.com)

Website: [www.levven.com](http://www.levven.com)