



Description

GPDT15 Controllers work with Levven wire-free switches to wirelessly to dim lights and turn lights on and off. Use Levven devices anywhere in your home or business, including detached garages, gatehouses, exterior lights, barns, and storage buildings. All without running a wire to the switch.

Installation

Connect the power and the load to the controller, then mount the controller in a junction or switch box. Pair a Levven switch with the controller to turn on, off, and dim the load. For more detailed instructions, check the user manual.

Specifications:

Input	85-265VAC, 0.1~1.5A, 50/60Hz
Paired Switches	Up to 10 Switches
Wireless Range	75 m / 250 ft
Radio Frequency	900 MHz band
Encryption	128-bit
Color	Orange
Operating temp	-40°C to 50°C
Enclosure rating	Indoor use only

Physical dimensions:

Length	1.8" (46mm)
Width	1.5" (38mm)
Depth	1.1" (29mm)

Load ratings:

1.5A resistive, 1.5A general purpose (0.75 to 0.80PF), 1A tungsten-filament, halogen, 1A magnetic ballast or transformer, 1A e-ballast, 1/16HP (120V) or 1/10HP (250V) motor.




Incandescent
up to 1A




CFL
up to 1A



LED
up to 1A

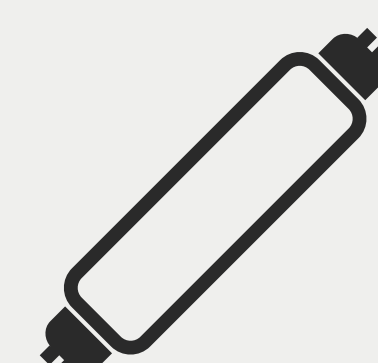


Flourescent
up to 1A

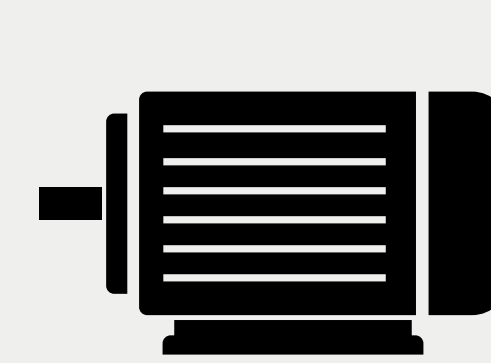

Motor
1/16 HP (120V) or
1/10HP (250V)

Wiring:

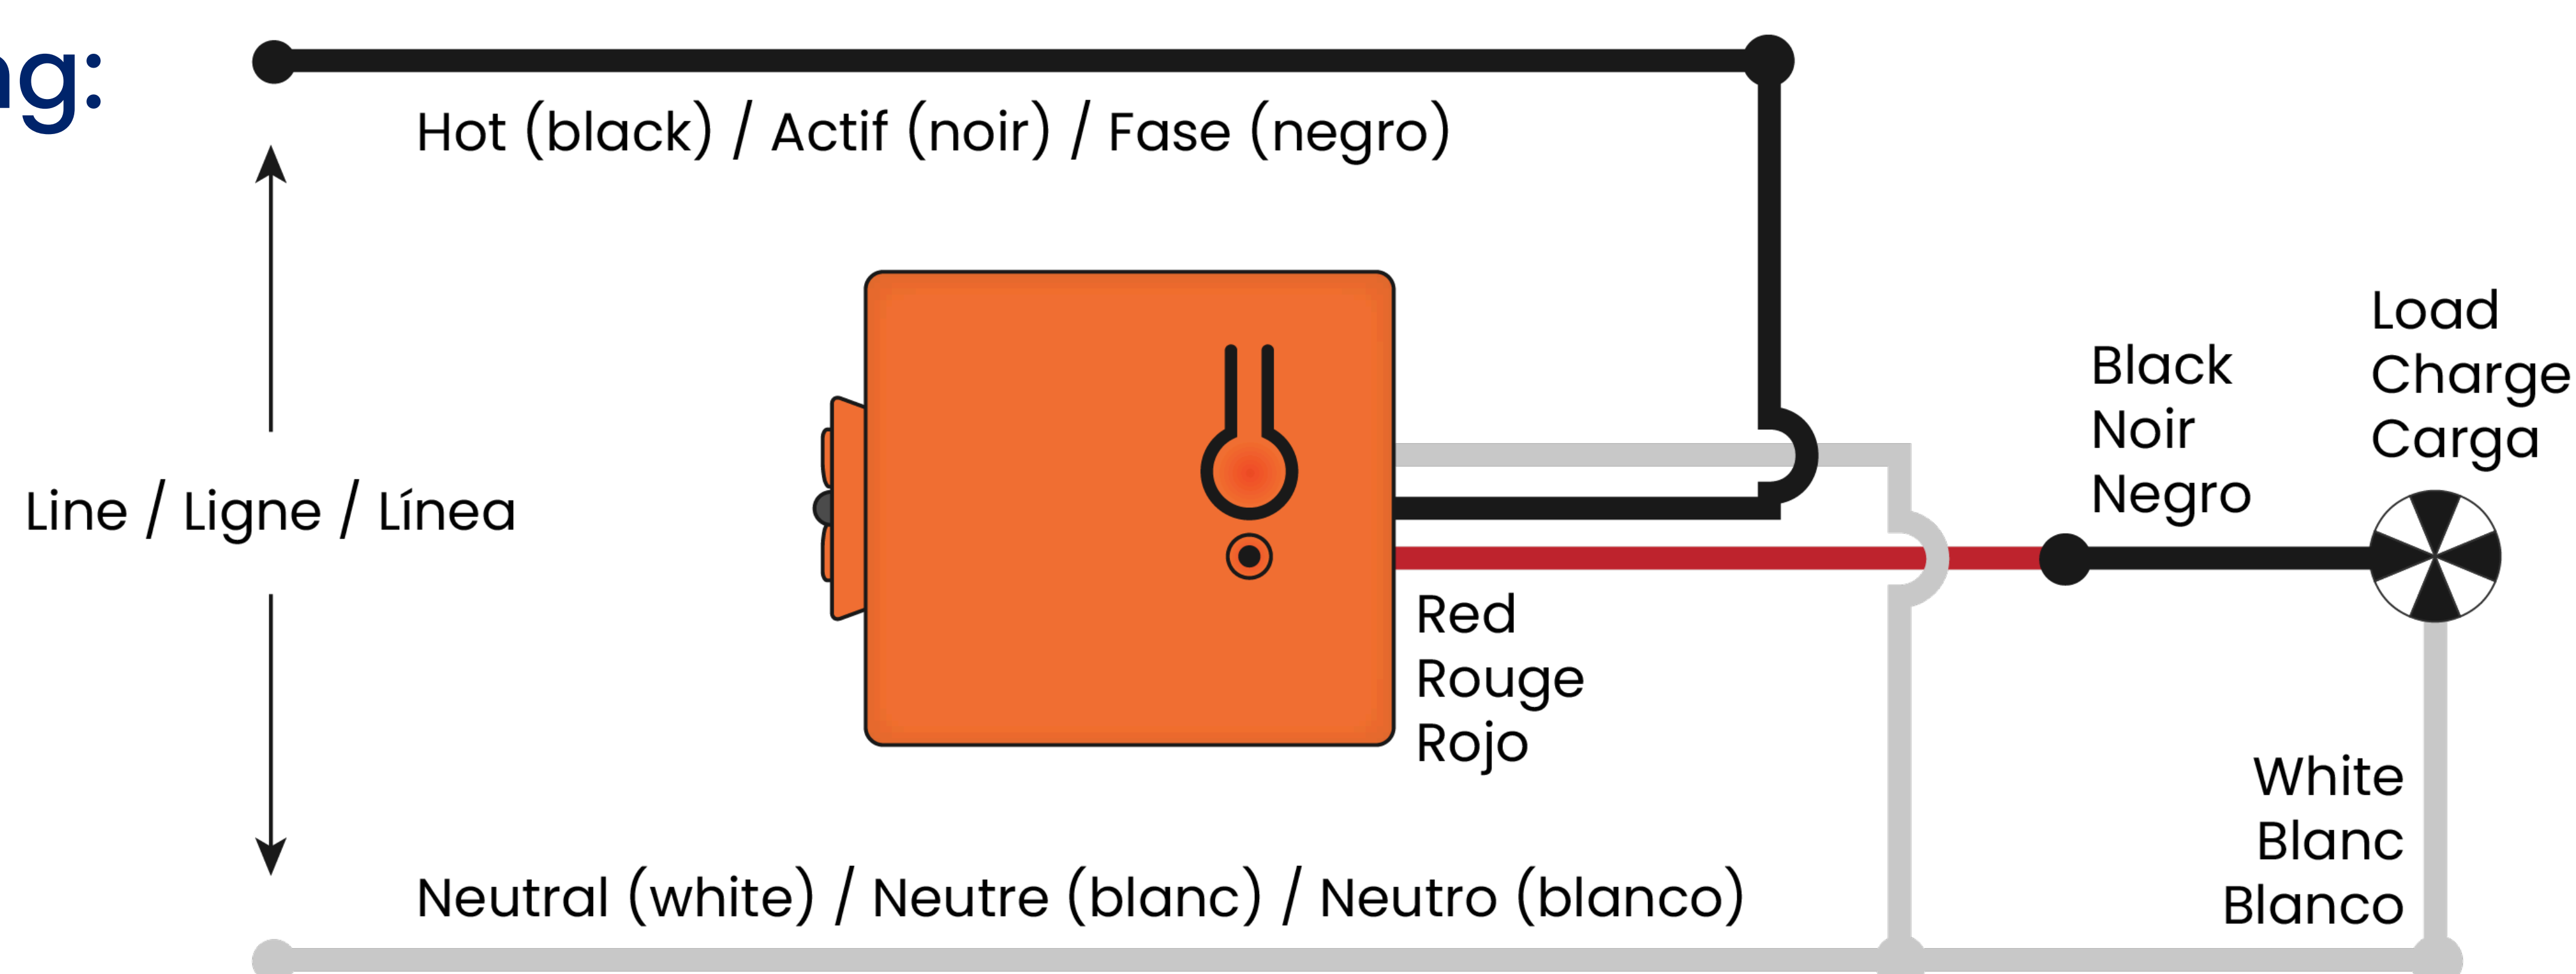

Certifications for GPDT15 Controller:

Certified to CSA STD C22.2 #14

Conforms to UL 244A & 508

FCC ID: 2ADH9-G2CF IC ID: 12453A-G2CF

C/US ETL Listed 4010961



Manufacturer information:

Levven Electronics Ltd.

9741 - 54 Ave NW

Edmonton, AB, Canada T6E 5J4

Proudly manufactured in

Telephone: +1 (844)-553-8836

Email: info@levven.com

Website: www.levven.com



Descripción

Los controladores GPDT15 funcionan con los interruptores inalámbricos de Levven para atenuar y encender o apagar las luces de forma inalámbrica. Usa los dispositivos Levven en cualquier lugar de tu hogar o negocio, como garajes independientes, casetas, luces exteriores, graneros y almacenes. Todo sin necesidad de cablear el interruptor.

Instalación

Conecta la alimentación y la carga al controlador, luego móntalo en una caja de empalme o de interruptor. Empareja un interruptor Levven con el controlador para encender, apagar y atenuar la carga. Consulta el manual del usuario para más detalles.

Presupuesto:


Aporte	85-265VAC, 0.1~1.5A, 50/60Hz
Interruptores emparejados	Hasta 10 interruptores
Alcance inalámbrico	75 m / 250 pies
Radiofrecuencia	Banda de 900 MHz
Cifrado	128-bit
Color	Naranja
Temperatura de funcionamiento	-40°C a 50°C
Clasificación del gabinete	Solo uso en interiores

Dimensiones físicas:

Longitud	1.8" (46mm)
Ancho	1.5" (38mm)
Profundidad	1.1" (29mm)

Clasificaciones de carga:

1.5A resistiva, 1.5A uso general (0.75 a 0.80 PF), 1A filamento de tungsteno, halógeno, 1A balastro o transformador magnético, 1A balastro electrónico, 1/16HP (120V) o 1/10HP (250V) motor.

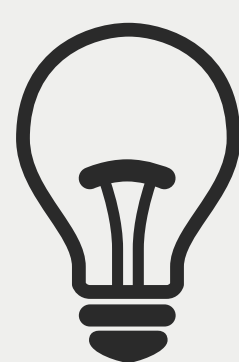


Incandescente hasta 1A




CFL hasta 1A



LED hasta 1A

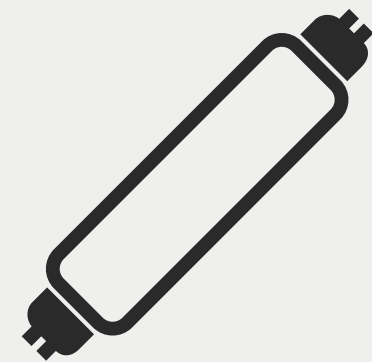


Fluorescente hasta 1A

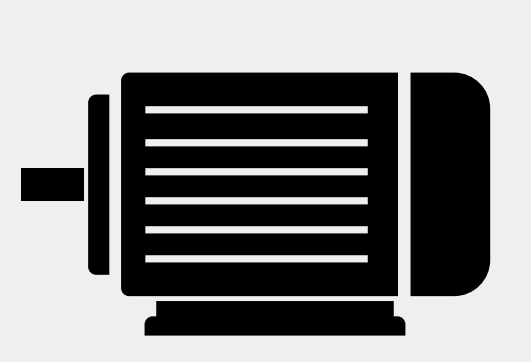

Motor 1/16 HP (120V) o 1/10HP (250V)

Alambrado:

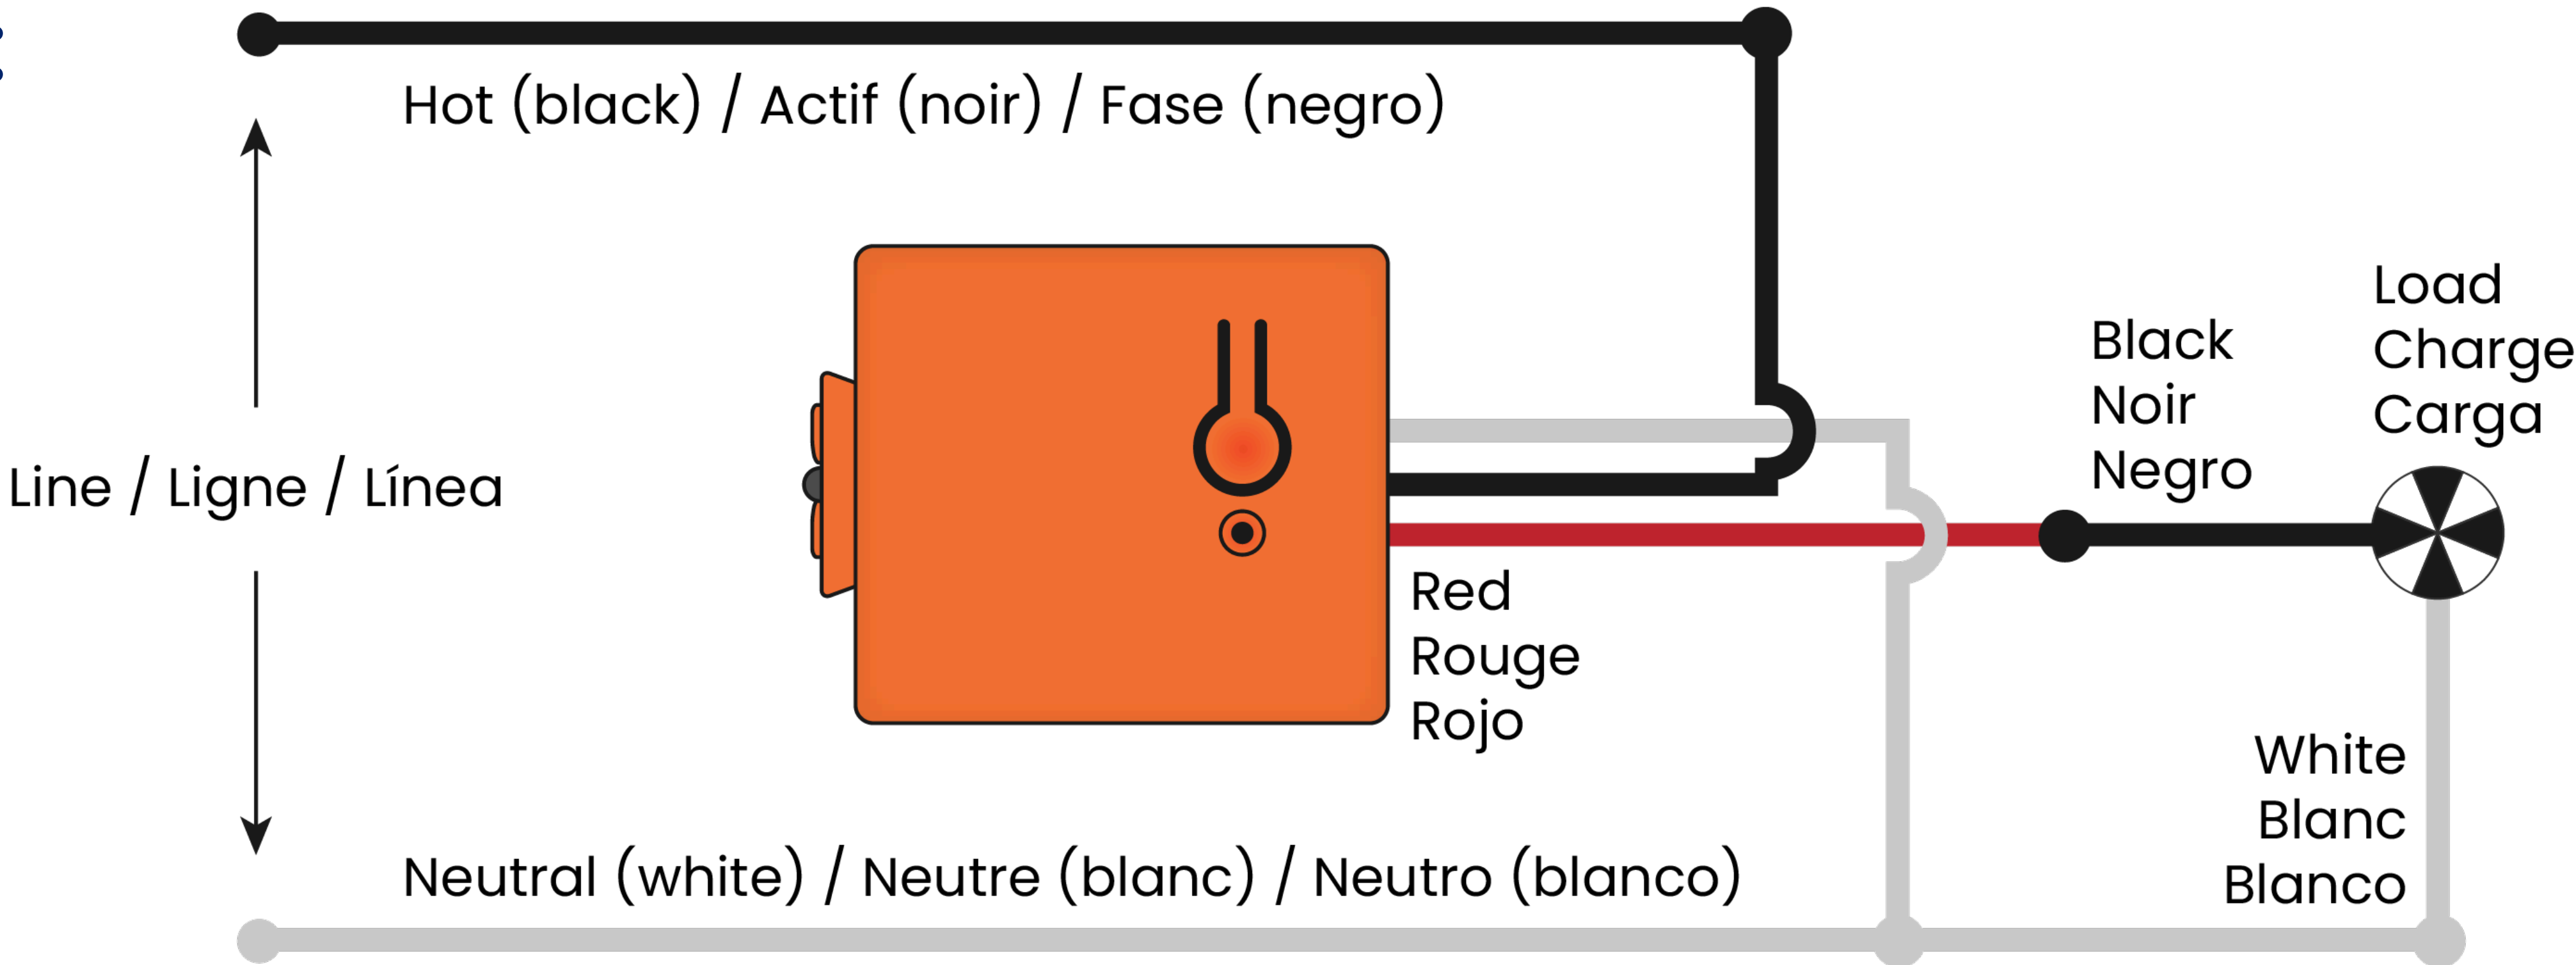

Certificaciones para el controlador GPDT15:

Certificado según CSA STD C22.2 n.º 14

Cumple con UL 244A y 508

ID FCC: 2ADH9-G2CF ID IC: 12453A-G2CF

Listado ETL C/US 4010961



Información del fabricante:

Levven Electronics Ltd.

9741 - 54 Ave NW

Edmonton, AB, Canadá T6E 5J4

Fabricado con orgullo en 

Teléfono: +1 (844)-553-8836

Correo electrónico: info@levven.com

Sitio web: www.levven.com